



## 330TL M12

### MULTI-MPPT STRING INVERTER WITH THE MAXIMUM POWER DENSITY

#### Greater cost-effectiveness

Thanks to its greater output power, the new INGECON® SUN 330TL M12 allows to drastically reduce the number of inverters required for designing a PV power plant. Thus, it minimises the labour cost and reduces the global cabling cost. Moreover, it does not require DC combiner boxes, ensuring the minimum possible CAPEX (Capital Expenditures). Furthermore, its string inverter philosophy permits an easy and immediate replacement that does not require qualified technicians.

#### Higher flexibility and power density

The highest flexibility thanks to its maximum DC voltage (1,500 V) and to its wide voltage range MPP (850-1,300 V). Awesome power density, with up to 330 kW.

#### Long-lasting and rugged design

Aluminium casing, especially conceived for indoor and outdoor applications (IP66). The INGECON® SUN 330TL M12 inverters have been designed to guarantee a long life expectancy and to withstand extreme temperatures.

#### Wi-Fi communication as standard

The inverter features Wi-Fi communication as standard. This Wi-Fi interface is used to commission the inverter through the INGECON® SUN Monitor App, available for iOS and Android. A wizard guides the user through the entire start-up process. Moreover, the Wi-Fi interface allows connecting the inverter to any Wi-Fi network available in the plant for monitoring purposes.

#### SPE (Single Pair Ethernet)

The inverter features SPE communication as standard. The SPE offers high-speed IP communication without the 100-meter distance limitation of standard Ethernet. Using SPE, the communication with the inverters can be established up to 1,000 meters. Moreover, these inverters enables daisy chain connection. Thus, several inverters can be connected to the same SPE line. The versatility and possibilities offered by the SPE are an important improvement at the plant's communication network

#### Remote monitoring

The inverter can be monitored with the [www.ingeconsunmonitor.com](http://www.ingeconsunmonitor.com) website or with the INGECON® SUN Monitor App.

## 330 TL M12

### Multi MPPT inverter with the maximum power density

#### Fully equipped


In order to achieve the maximum performance with the maximum cost-effectiveness, the INGECON® SUN 330TL M12 inverter is supplied totally equipped with all the electrical protections.

#### Integrated components

- Photovoltaic connectors
- DC switch (3 units).
- DC surge arresters, type II.
- AC surge arresters, type II.
- Strings current metering kit.
- Wi-Fi communication.
- SPE (Single Pair Ethernet) communication

#### Main features

- 12 MPPT.
- PID recovery as standard.
- Reactive power capability.
- Reactive power injection at night as a standard.
- Low-voltage ride-through capability.
- 99.05% maximum efficiency.
- Single Pair Ethernet and Wi-Fi communications supplied as standard.
- Integrated Webserver.
- Software INGECON® SUN Monitor for PV plant monitoring.
- Suitable for indoor and outdoor installations (IP66).
- High temperature performance.
- One digital input and one digital output.

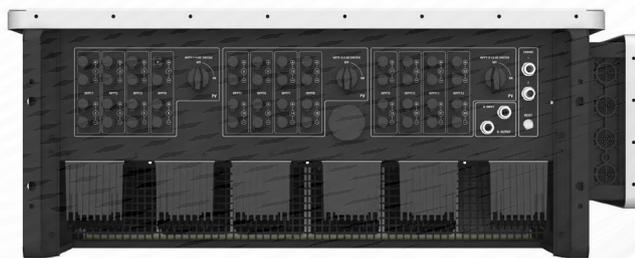


#### Protections

- Shortcircuits and overloads at the output.
- Anti-islanding with automatic disconnection.
- Insulation faults.
- AC overvoltages with type II surge arresters.
- DC overvoltages with type II surge arresters.

#### Benefits


- Greater power density.
- Greater cost-effectiveness thanks to the cabling cost reduction.
- High availability compared to central inverters.
- High efficiency rates.
- Easy maintenance.

#### Size and weight (mm)



**330TL M12**  
150 kg.

#### Efficiency

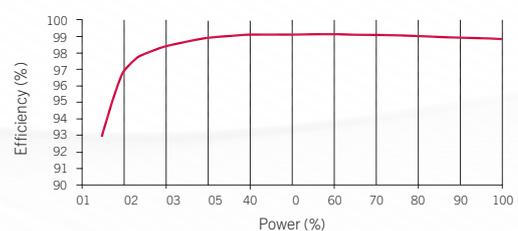

INGECON® SUN 330TL M12

800 V

**INPUT (DC)**

Operating voltage range	700 - 1,500 V
MPP voltage range	850 - 1,300 V
Maximum voltage	1,500 V
Max. current per input	22.5 A
Max. short circuit current per MPPT	60 A
Number of inputs per MPPT	2
Number of MPPTs	12

**OUTPUT (AC)**

Rated power	330 kVA
Maximum current	238 A
Ambient temperature for rated power	40°C
Rated voltage	3 / PE, 800 V
Frequency	50 / 60 Hz
Type of grid	IT
Power Factor	1
Power Factor adjustable <sup>(1)</sup>	Yes, 0-1 (leading / lagging)
THD (Total Harmonic Distortion) <sup>(2)</sup>	<3%

**EFFICIENCY**

Maximum efficiency	99.05%
Euroefficiency	98.60%

**GENERAL INFORMATION**

Cooling system	Forced ventilation
Air flow	900 m <sup>3</sup> /h
Aux. consumption	25 W
Operation temperature	-30° C to 60° C
Relative humidity (non-condensing)	0 - 100%
Protection class	IP66 / NEMA 4
Residual current monitoring unit	Yes

Maximum operating altitude 4,000 m.a.s.l. (for installations beyond 1,000 m.a.s.l., please contact Ingeteam's Solar Sales Department)

Connection AC connection: max. cross section: 400 mm<sup>2</sup> (one wire)  
DC connection: 6 mm<sup>2</sup> MC4-Evo<sup>2</sup> (10 mm<sup>2</sup> optional)

Marking CE

EMC and security standards EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, EN 61000-3-2, EN 61000-3-3, EN 61000-3-11, EN 61000-3-12, EN 62109-1, EN 62109-2, IEC62103, EN 50178, FCC Part 15, IEC60068-2-1:2007, IEC60068-2-2:20007, IEC60068-2-14:2009, IEC60068-2-30:2005, IEC62116, IEC61683 y EN50530


Grid connection standards DIN V VDE V 0126-1-1, EN 50439, EN 50549, CEI 0-21, CEI 0-16 VDE-AR-N 4105:2011-08, P.O.12.3, BDEW, IEC 62116, IEC 61727, UNE 206007-1, ABNT NBR 16149, ABNT NBR 16150, Brazilian Grid Code, South African Grid Code, Chilean Grid Code, DEWA 2.0, Jordanian Grid Code, G99, VDE-AR-4110, NTS de REE, Directive EU 2016/631

**Notes**

<sup>(1)</sup> Extended adjustment range for nominal working points.

<sup>(2)</sup> For rated AC power and voltage in accordance with IEC 61000-3-4.

**Single-line diagram**

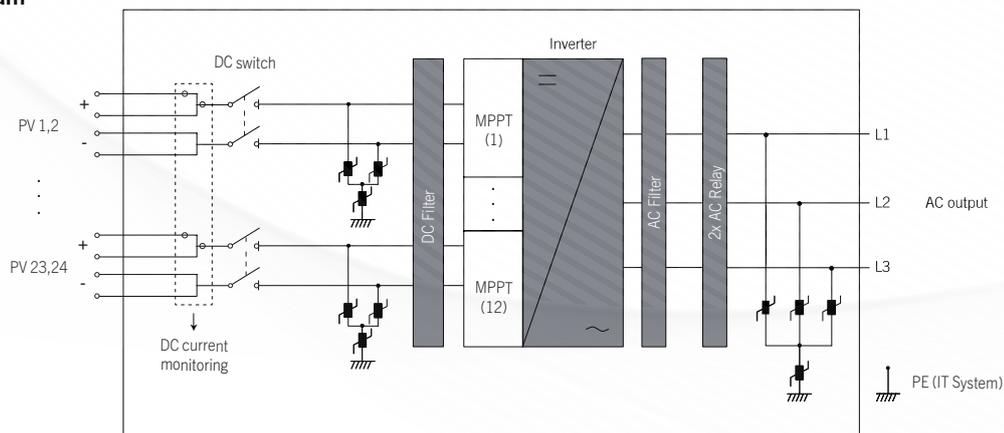

Specifications included in this datasheet could change without notice. Please contact Ingeteam's sales department in case of any queries.

300002270\_A

## EUROPE

**Ingeteam Power Technology, S.A.**  
Avda. Ciudad de la Innovación, 13  
31621 Sarriguren (Navarra) - Spain  
Tel.: +34 948 288 000  
Fax: +34 948 288 001  
e-mail: solar.energy@ingeteam.com  
bess.energy@ingeteam.com

**Ingeteam S.A.**  
Parque Tecnológico de Bizkaia  
Edificio 106  
48170, Zamudio (Bizkaia) – Spain  
Tel.: +34 944 039 710

**Ingeteam S.r.l.**  
Via Emilia Ponente, 232  
48014 Castel Bolognese (RA) - Italy  
Tel.: +39 0546 651 490  
Fax: +39 054 665 5391  
e-mail: italia.energy@ingeteam.com

**Ingeteam SAS**  
140 Rue Carmin - Le Naurouze B  
31670 Labège - France  
Tel.: +33 (0)5 61 25 00 00  
Fax: +33 (0)5 61 25 00 11  
e-mail: france@ingeteam.com

**Ingeteam, a.s.**  
Technologická 371/1  
70800 Ostrava - Pustkovec  
Czech Republic  
Tel.: +420 597 476 820  
Fax: +420 59 732 6899  
e-mail: czech@ingeteam.com

**Ingeteam GmbH**  
Grand Bateau – Zollhof 6  
D-40221 – Düsseldorf, Germany  
Tel.: +49 (0) 211 78177950  
e-mail: deutschland@ingeteam.com

**Ingeteam Poland Spzoo**  
Ul. Koszykowa 60/62 m 39  
00-673, Warsaw, Poland  
Tel.: (+48) 22 821 99 30  
e-mail: polska@ingeteam.com

**Ingeteam LTD.**  
1st Floor, Midas House, 62 Goldsworth Road,  
Woking, Surrey GU21 6LQ - United Kingdom  
Tel.: +44 (0) 141 488 5290

## NORTH AMERICA

**Ingeteam Inc.**  
3550 W. Canal St.  
Milwaukee, WI 53208 - USA  
Tel.: +1 (414) 934 4100 / +1 (855) 821 7190  
Fax: +1 (414) 342 0736  
e-mail: usa@ingeteam.com

**Ingeteam Power Technology S de RL de CV**  
Av. Ejercito Nacional Mexicano 351, Chapultepec  
Morales, Granada, Manuel Hidalgo  
CP: 11520  
Ciudad de México, México  
Tel.: (+52) 55 6586 9930  
e-mail: proveedores.ipm@ingeteam.com

## SOUTH AMERICA

**Ingeteam Ltda.**  
Rua Estácio de Sá, 560  
Santa Genebra  
Campinas - SP  
CEP: 13080-010; São Paulo - Brazil  
Tel.: (+55) 19 30 37 37 73  
e-mail: brazil@ingeteam.com

**Ingeteam Chile SpA**  
Balmoral n.º 309, Piso 10º, Oficina 1008,  
7561282 Las Condes  
Santiago, Chile  
Tel.: (+56) 229 253 825  
e-mail: chile@ingeteam.com

## ASIA

**Ingeteam Power Technology Shanghai, Co. Ltd.**  
Room 2606-F, No.360 South Pudong Road  
China (Shanghai) pilot free trade zone  
C.P 200120  
Tel.: +86 139 1622 4886  
e-mail: liu.yimin@ingeteam.com

**Ingeteam India Pvt. Ltd.**  
Survey No. 111/1-111/3 & 111/5-111/7,  
Village No.155, Mambakkam Village,  
Chennai - Bangalore Main Road,  
Sriperumbudur Taluk,  
Kancheepuram District - 602106,  
Tamilnadu, India

**Ingeteam Power Technology S.A. UAE Branch**  
Al Bateen tower c6 Bainunah 1st floor  
Street 34  
Abu Dhabi - UAE  
Tel.: +971 2 207 6666

**Ingeteam Power Technology S.A.**  
Thailand representative office  
100/67 Vongvanij B Building, 22nd floor,  
Rama IX Road., Huaykwang,  
10320 Bangkok  
Te.: +66 22461798  
e-mail: Thailand.pga@ingeteam.com

**Ingeteam Vietnam CO., LTD**  
Spaces Building, 28A Tran Hung Dao Street,  
Phan Chu Trinh Ward Hoan Kiem District,  
Hanoi City, Vietnam

## AUSTRALIA

**Ingeteam Australia Pty Ltd.**  
Iaccelerate Centre, Building 239  
Innovation Campus, Squires Way  
North Wollongong, NSW 2500 - Australia  
Tel.: +61 429 111 190  
e-mail: australia@ingeteam.com

# Ingeteam

www.ingeteam.com